

DSBI

DSBI SERIES DOUBLE SHEAR BEAM STAINLESS STEEL LOAD CELLS



Stainless steel double shear beam load cells suitable for building, for example, to make CE-M approved scales for high capacities or for weighing tanks and hoppers with the relevant accessories. High accuracy also with the expansion of the weighing structures.

CAPACITIES (kg): 10000, 20000, 30000.

17-4 PH stainless steel. IP68 protection. C4 precision class.

Working in cooperation with:

VAHY ROBIN S.R.O.

U SOKOLOVNY 115 - 66434 - MORAVSKE KNINICE
Tel. 00420-777433576
vahyrobin@seznam.cz

The best solution
for advanced industrial
applications

TECHNICAL FEATURES

- C4 PRECISION CLASS
- 17-4 PH STAINLESS STEEL CONSTRUCTION
- IP68 PROTECTION
- MAX. CAPACITIES FROM 10000 TO 30000 kg
- SHIELDED CONNECTION CABLE
- TEST CERTIFICATE AVAILABLE UPON REQUEST


MAIN FEATURES

- Minimum load cell verification interval: $V_{min} = E_{Max} / 10.000$
- Combined error 0,03% of Full Scale Output (F.S.)
- Full Scale Output: 2mV/V +/- 0,1%
- Temperature effect on zero: 0,00116% /°C
- Temperature effect on full scale output: 0,00097% /°C
- Compensated Temperature Range: -10°C/+40°C
- Operating Temperature Range: -30°C/+85°C
- Creep error after 30 minutes: <0,02% F.S.
- Maximum tolerated excitation voltage: 15 VDC
- Input Resistance: $700 \pm 7 \text{ Ohm}$
- Output Resistance: $700 \pm 7 \text{ Ohm}$
- Zero Balance: +/- 1% F.S.
- Insulation Resistance: >5000 MOhm
- Safe Overload: 150% F.S.
- Ultimate Overload: 300% F.S.
- 6-wire shielded cable, 15m long

ATEX VERSION

- The CCATEX certificate makes the load cell suitable for use in hazardous areas with protection methods according to:
ATEX II 1G Ex ia IIC T6 (Ta -20÷+40°C) TX (Ta -20÷+65°C) Ga
ATEX II 1D Ex ta IIIC TX°C (Ta -20÷+40°C) TX°C (Ta -20÷+65°C) Da IP65.
The certificate includes the manual and the ATEX CE conformity declaration (available in EN, DE, FR, and IT).
- **IMPORTANT:** the certificate refers to the single load cell. For systems with more load cells, it is necessary to order one certificate for each load cell.

DETAIL 1

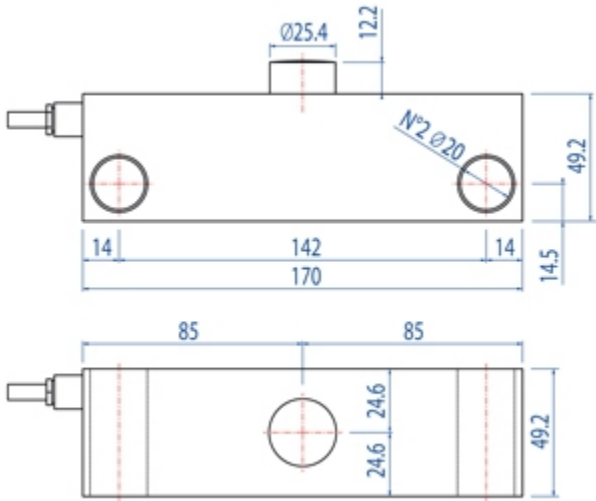

dimensions in mm

Wiring Code	
<i>Colour</i>	<i>Function</i>
GREEN	OUTPUT +
PURPLE	SENSE +
RED	INPUT +
WHITE	OUTPUT -
BLACK	INPUT -
GREY	SENSE -

VERSIONS

Models available

Code	Max (kg)	Masterpack 4 pcs
DSBI10	10000	DSBI10C
DSBI20	20000	DSBI20C
DSBI30	30000	DSBI30C



www.diniargeo.com



“YOUR WORLDWIDE PARTNER FOR WEIGHING,”

DINI ARGEO
FRANCE sarl
Nogent-sur-Marne

DINI ARGEO
GMBH
Sinsheim - Germany

DINI ARGEO
UK Ltd
Taunton - United Kingdom

DINI ARGEO WEIGHING
INSTRUMENTS Ltd
Shanghai - China

DINI ARGEO
WEIGHBRIDGES
Calto (RO) – Italy



HEAD OFFICE
Via Della Fisica, 20
41042 Spezzano di Fiorano Modena - Italy



VAHY ROBIN S.R.O.

U SOKOLOVNY 115 - 66434 - MORAVSKE KNINICE

Tel. 00420-777433576

vahyrobin@seznam.cz

SALES AND TECHNICAL ASSISTANCE SERVICE